

CE IP 44

2952

## Decorative Mirror Light

### TECHNICAL DATA

**Mounting:** Surface  
**Body:** Steel  
**Colour:** Black, Gold, Chrome, Nickel, Bronze  
**Protection:** IP44  
**Operation temperature:** 0°~+35°

### ELECTRICAL DATA

**Power:** 5W  
**Type of Equipment:** ED, Dimmable on request  
**Power factor:**  
**Input Voltage:** AC 220-240V/50-60Hz

### OPTICAL DATA

**Beam Angle:** Wide Beam  
**Way of lighting:** Direct  
**Diffuser:** Acrylic (Frosted)  
**CCT:** 3000K, 4000K, 6000K  
**CRI:** 80<

### GENERAL DATA

**Warranty:**  
**Application :** Washroom, Bathroom, Dressing room etc..



Code	Type of Equipment	Power	CRI / Ra	Luminous		Operating Temperature Range
				Efficacy	Lumens	
2952.1005.0102	ED	5	80	85	425	0°~+45°

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.


The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.


Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.

## ORDER DETAILS

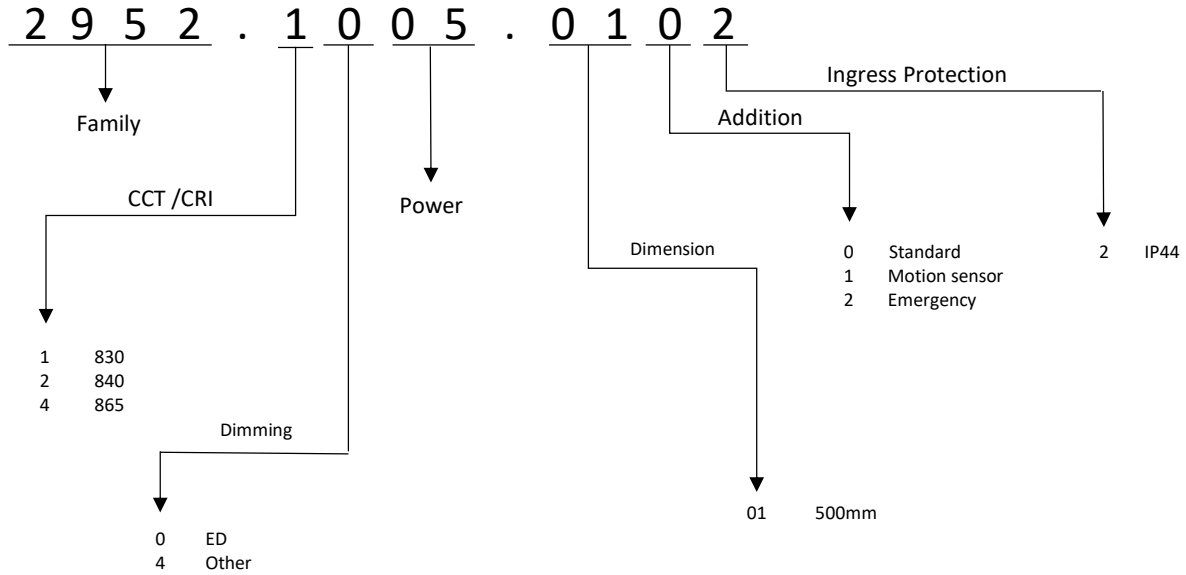

Code	Dimension (mm)
2952.1005.0102	L 500 X W 120 X H 90

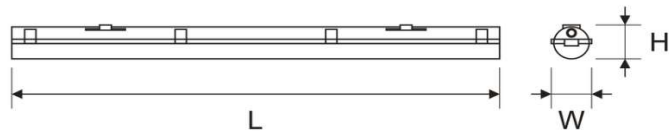

## PHOTOMETRIC DISTRIBUTIONS

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.