

CE IP 44

1110

Recessed Down Light

TECHNICAL DATA

Mounting: Recessed
Body: Diecast Aluminium as heat sink
Colour: White
Protection: IP44
Operation temperature: 0~35°

ELECTRICAL DATA

Power: 24-30W
Type of Equipment: ED, Dimmable on request
Power factor: 0.9<
Input Voltage: AC 220-240V 50/60Hz

OPTICAL DATA

Beam Angle: 110°
Way of lighting: Direct
Diffuser: Polycarbonate Opal
CCT: 3000K, 4000K, 6500K
CRI: 80<

GENERAL DATA

Warranty: 5Years
Application: Corridors, Washrooms, Living rooms, Shopping stores and Areas with low ceilings



****Lumiled Chip & Philips Driver**

Code	Type of Equipment	Power	CRI / Ra	Luminous Efficacy	Lumens	Operating Temperature Range
1110.XX24.0442	ED/DIM	24	80	105	2520	0 - 35
1110.XX30.0442	ED/DIM	30	80	105	3150	0 - 35

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.


The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.

ORDER DETAILS

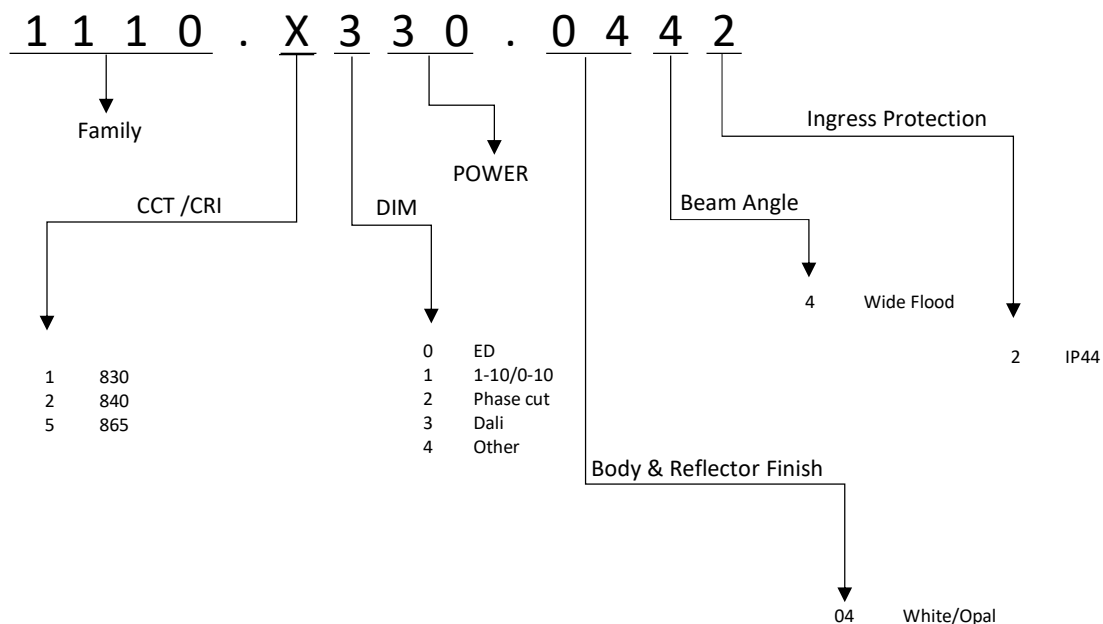

Code	Dimension (mm)	Cutout (mm)
1110.XX24.0442	D 230 X H 40	205
1110.XX30.0442	D 230 X H 40	205



Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.