

CE IP 44

1047

## Recessed Down Light

### TECHNICAL DATA

**Mounting:** Recessed  
**Body:** Diecast Aluminium  
**Colour:** White  
**Protection:** IP44  
**Operation temperature:** 0-35

### ELECTRICAL DATA

**Power:** 7W-30W  
**Type of Equipment:** ED, Dimmable on request  
**Power factor:** 0.9<  
**Input Voltage:** AC 220-240V 50/60Hz

### OPTICAL DATA

**Beam Angle:** 50  
**Way of lighting:** Direct  
**Diffuser:** Acrylic  
**CCT:** 3000K, 4000K, 5000K  
**CRI:** 90<

### GENERAL DATA

**Warranty:** 5Years  
**Application :** Office, Residential, Hospitals



Code	Type of Equipment	Power	CRI / Ra	Luminous Efficacy	Lumens	Operating Temperature Range
1047.XX07.0032	ED	7	90	90	630	0 - 35
1047.XX12.0032	ED	12	90	90	1080	0 - 35
1047.XX18.0032	ED	18	90	90	1620	0 - 35
1047.XX23.0032	ED	23	90	90	2070	0 - 35
1047.XX30.0032	ED	30	90	90	2700	0 - 35

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.


The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.


Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.

## ORDER DETAILS

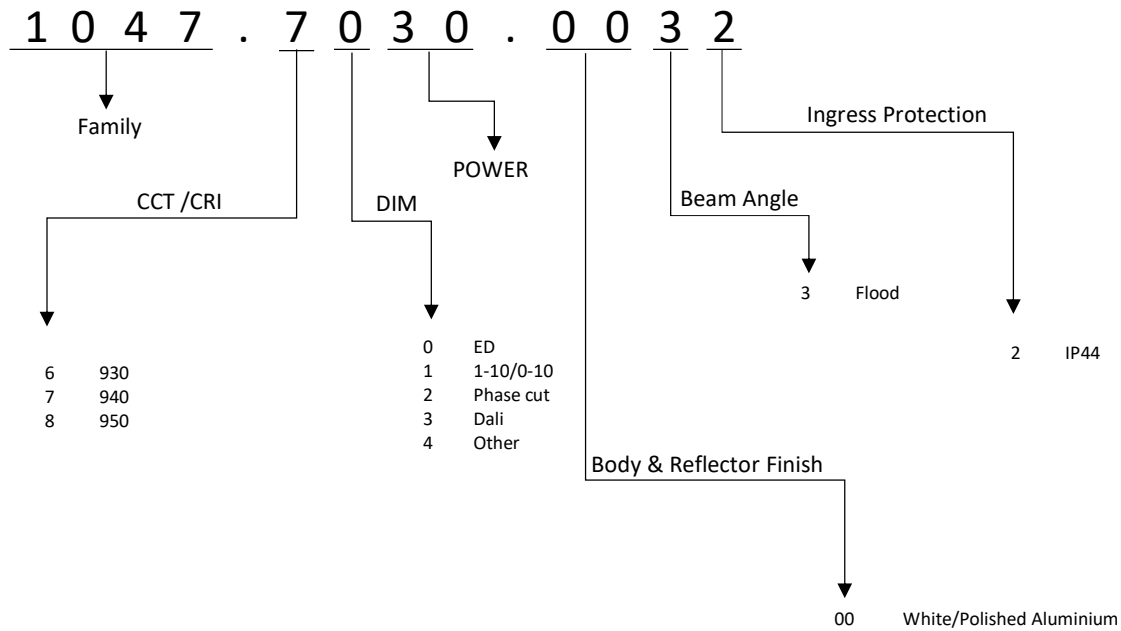

Code	Dimension (mm)	Cutout (mm)
1047.XX07.0032	D 87 X H 33	80
1047.XX12.0032	D 115 X H 42	105
1047.XX18.0032	D 142 X H 50	130
1047.XX23.0032	D 169 X H 58	158
1047.XX30.0032	D 217 X H 70	200



Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.