

CE IP 20

3101

Decorative Pendant

TECHNICAL DATA

Mounting: Surface
Body: Steel
Colour: Black, Gold, Chrome, Nickel, Bronze
Protection: IP20
Operation temperature: 0-35

ELECTRICAL DATA

Power:
Type of Equipment: ED, Others on request
Power factor:

OPTICAL DATA

Beam Angle:
Way of lighting: Direct
Diffuser:
CCT: 3000K, 4000K, 6000K
CRI: 80<

GENERAL DATA

Warranty: 5Years
Application : Office, Residential, Shops




Code	Type of Equipment	Power	CRI / Ra	Luminous Efficacy	Lumens	Operating Temperature Range
3101.XX15.XX31	ED/DIM	3 x 5W E27	80	85	1275	0 - 35

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.
 The operating temperature ranges apply only to luminaires used in the outdoor environment.
 Power tolerance +/- 5%.
 Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.

ORDER DETAILS

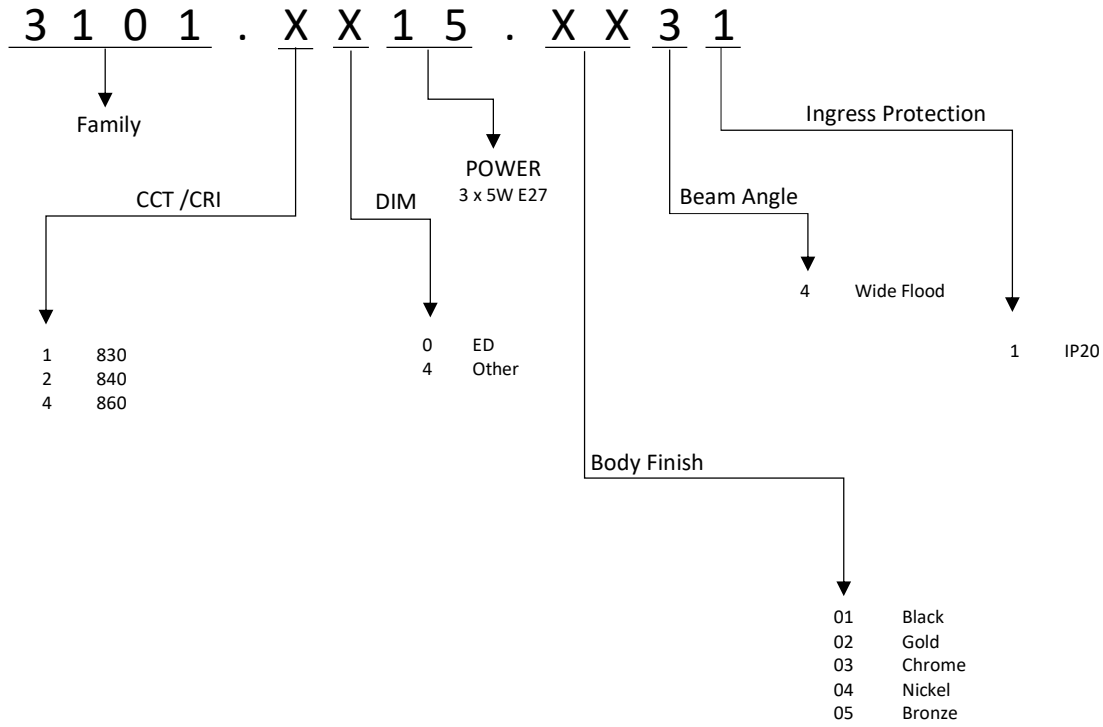

Code

3101.XX15.XX31

Dimension (mm)

D: 650 x H: 170



Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.
The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.