

CE IP 44

2950

Over Mirror Luminaire with Switch

TECHNICAL DATA

Mounting: Surface
Body: Aluminum
Colour: White Body / Chrome Endcap
Protection: IP44
Operation temperature: 0⁰~+45⁰

ELECTRICAL DATA

Power: 10 / 15W
Type of Equipment: ED, Dimmable on request
Power factor: 0.9<
Input Voltage: AC 220-240V/50-60Hz

OPTICAL DATA

Beam Angle: Wide Beam
Way of lighting: Direct
Diffuser: PC
CCT: 3000K, 4000K, 6500K
CRI: 80<

GENERAL DATA

Warranty:
Application : Washroom, Bathroom, Dressing room etc..



Code	Type of Equipment	Power	CRI / Ra	Luminous		Operating Temperature
				Efficacy	Lumens	Range
2950.X010.0102	ED	10	80	85	850	0 ⁰ ~+45 ⁰
2950.X015.0202	ED	15	80	85	1275	0 ⁰ ~+45 ⁰

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.


The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.


Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.

ORDER DETAILS

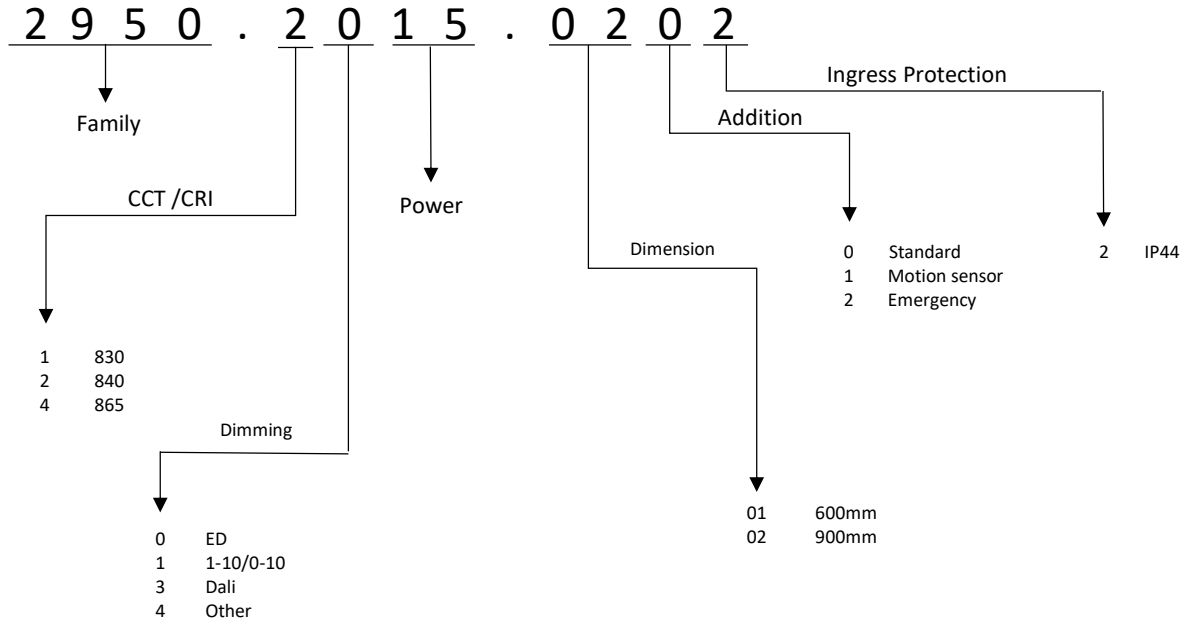

Code	Dimension (mm)
2950.X010.0102	L 605 X W 54 X H 65
2950.X015.0202	L 905 X W 54 X H 65

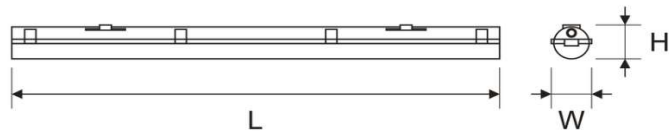

PHOTOMETRIC DISTRIBUTIONS

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.