

CE IP 65 IK 08

## 7500

# Pole Top light fixtures

### TECHNICAL DATA

**Mounting:** Pole Mounted  
**Body:** Heavy Duty Diecast Aluminium  
**Colour:** Grey, Black, other RAL colour on request  
**Protection:** IP65  
**Operation temperature:** -25 ~ +50

### ELECTRICAL DATA

**Power:** 30W / 60W / 100W / 150W  
**Type of Equipment:** ED, Dimmable on request  
**Power factor:** 0.95<

### OPTICAL DATA

**Beam Angle:** 90° x 90°, T2-S  
**Way of lighting:** Direct  
**Diffuser:** Tempered Glass  
**CCT:** 3000K - 6500K  
**CRI:** 70/80<

### GENERAL DATA

**Application :** Parking, Parks, Gardens



| Code           | Type of Equipment | Power | CRI / Ra | Luminous Efficacy | Lumens | Operating Temperature Range |
|----------------|-------------------|-------|----------|-------------------|--------|-----------------------------|
| 7500.XX30.XXX4 | ED                | 30    | 70       | 100               | 3000   | -25 ~ +50                   |
| 7500.XX60.XXX4 | ED                | 60    | 70       | 100               | 6000   | -25 ~ +50                   |
| 7500.X100.XXX4 | ED                | 100   | 70       | 100               | 10000  | -25 ~ +50                   |
| 7500.X150.XXX4 | ED                | 150   | 70       | 100               | 15000  | -25 ~ +50                   |

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.


The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.


Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.


## ORDER DETAILS

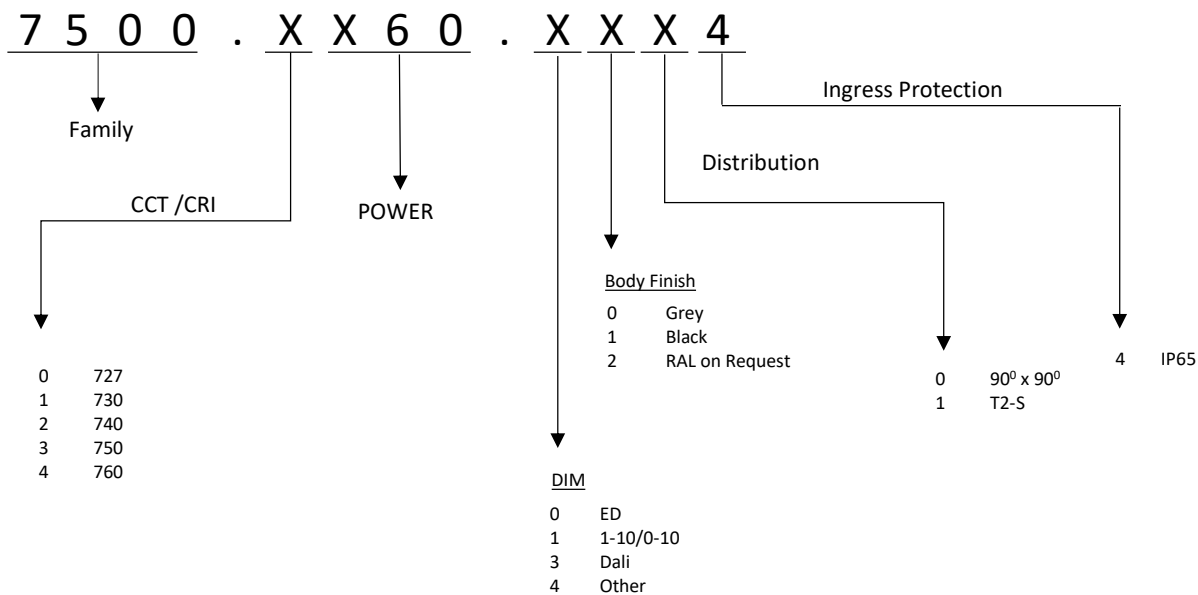


| Code           | Dimension (mm) | Mounting Dia (mm) |
|----------------|----------------|-------------------|
| 7500.XX30.XXX4 | D 488 X H 618  | 60/76             |
| 7500.XX60.XXX4 | D 488 X H 618  | 60/76             |
| 7500.X100.XXX4 | D 488 X H 618  | 60/76             |
| 7500.X150.XXX4 | D 488 X H 618  | 60/76             |



90°\*90°



T2-S

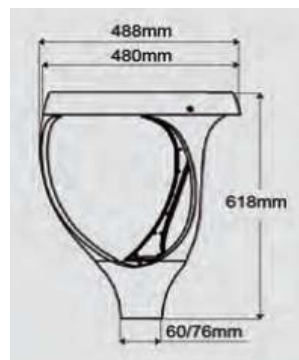

## PHOTOMETRIC DISTRIBUTIONS

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.