

CE IP 65 IK 08

6761

High Bay Luminaire (High Lumen)

TECHNICAL DATA

Mounting: Suspended (Suspension Cable included)

Body: Diecast Aluminium

Colour: Grey

Protection: IP65

Operation temperature: -30⁰ ~ +50⁰

ELECTRICAL DATA

Power: 80W / 125W / 145W / 200W

Type of Equipment: ED, Dimmable on request

Power factor: 0.95<

Input Voltage: AC 220-240V 50/60Hz

OPTICAL DATA

Beam Angle: 65⁰ / 75⁰

Way of lighting: Direct

Diffuser: PC Lens

CCT: 4000K / 5000K

CRI: 80<



GENERAL DATA

Application : Shopping Centres, Office, Airport, Indoor Gymnasium, Warehouse, Factory etc..

Warranty: 5 Years

Code	Type of Equipment	Power	CRI / Ra	Luminous Efficacy	Lumens	Operating Temperature Range
6761.XX80.XXX4	ED	80	80	160	12800	-30 ⁰ ~ +50 ⁰
6761.X125.XXX4	ED	125	80	160	20000	-30 ⁰ ~ +50 ⁰
6761.X145.XXX4	ED	145	80	160	23200	-30 ⁰ ~ +50 ⁰
6761.X200.XXX4	ED	200	80	160	32000	-30 ⁰ ~ +50 ⁰

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

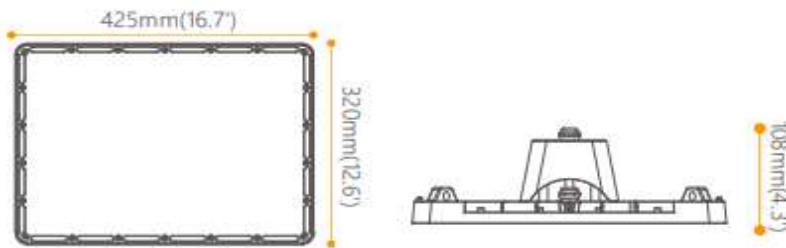
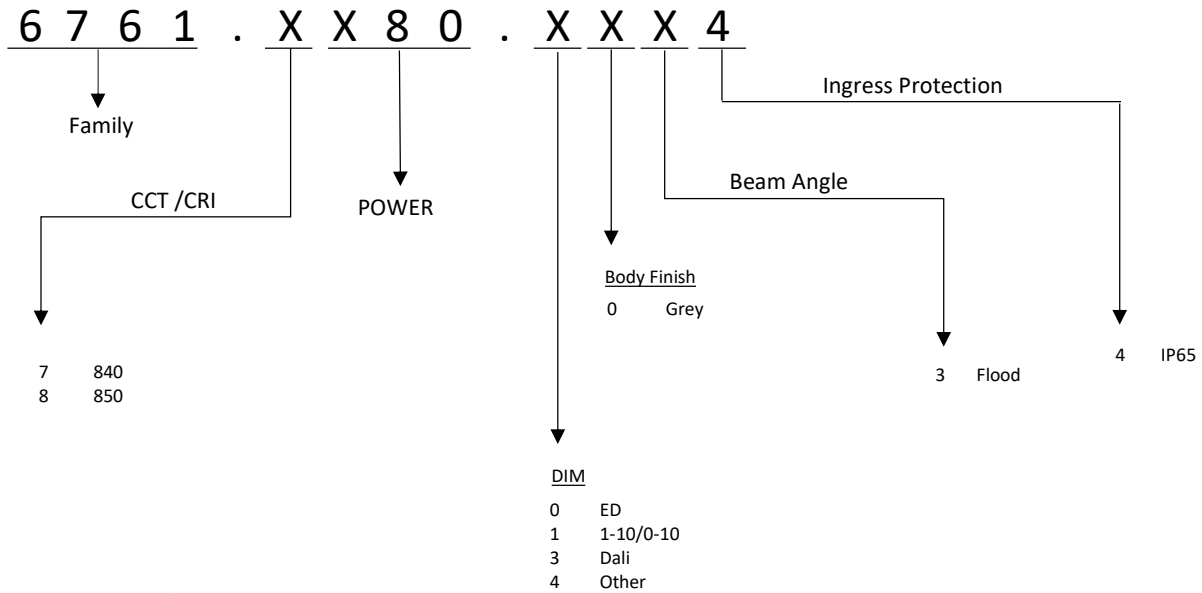
The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.



The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.

ORDER DETAILS



Code	Dimension (mm)
6761.XX80.XXX4	L 425 X W 320 X H 108
6761.X125.XXX4	L 425 X W 320 X H 108
6761.X145.XXX4	L 425 X W 320 X H 108
6761.X200.XXX4	L 425 X W 320 X H 108

Mounting Accessories (additional to be ordered separately)

Code: 6760.1	U-Shaped Rotatable bracket	
Code: 6760.2	Safety Chain	



PHOTOMETRIC DISTRIBUTIONS

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.