

CE IP 20

3102

Decorative Pendant

TECHNICAL DATA

Mounting: Surface
Body: Steel
Colour: Black, Gold, Chrome, Nickel, Bronze
Protection: IP20
Operation temperature: 0-35

ELECTRICAL DATA

Power:
Type of Equipment: ED, Others on request
Power factor:

OPTICAL DATA

Beam Angle:
Way of lighting: Direct
Diffuser: Clear Crystal
CCT: 3000K
CRI: 80<

GENERAL DATA

Warranty: 5Years
Application : Residential




Code	Type of Equipment	Power	CRI / Ra	Luminous Efficacy	Lumens	Operating Temperature Range
3102.XX25.XX31	ED/DIM	5 x 5W E14	80	85	2125	0 - 35

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.
 The operating temperature ranges apply only to luminaires used in the outdoor environment.
 Power tolerance +/- 5%.
 Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.

ORDER DETAILS

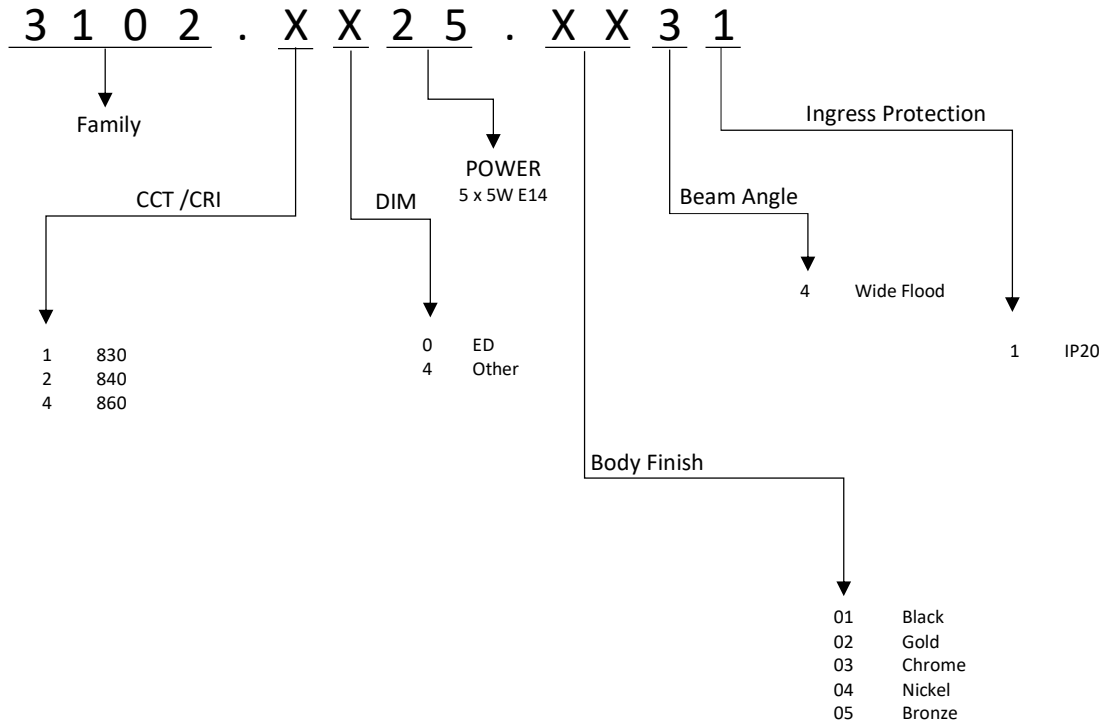


Code

3102.XX25.XX31

Dimension (mm)

L: 500 x W: 500 x H: 600

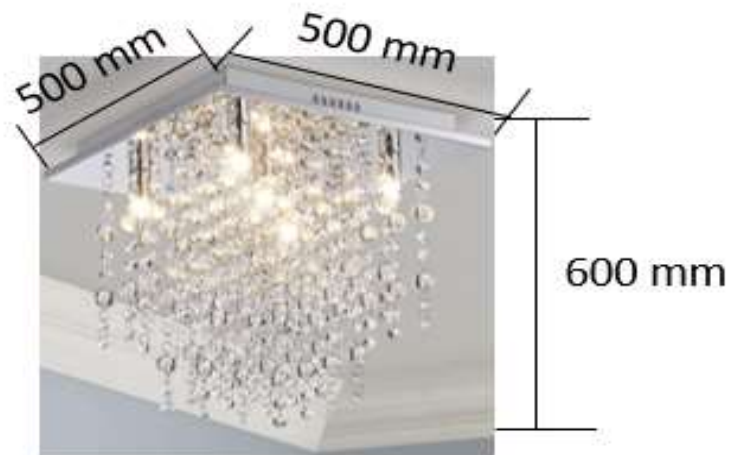

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating. The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.