

CE IP 65 IK 08

6760

High Bay Luminaire

TECHNICAL DATA

Mounting: Suspended (Suspension Cable included)

Body: Diecast Aluminium

Colour: Grey

Protection: IP65

Operation temperature: -30⁰ ~ +50⁰

ELECTRICAL DATA

Power: 80W / 125W / 145W / 200W

Type of Equipment: ED, Dimmable on request

Power factor: 0.95<

Input Voltage: AC 220-240V 50/60Hz

OPTICAL DATA

Beam Angle: 65⁰ / 75⁰

Way of lighting: Direct

Diffuser: PC Lens

CCT: 4000K / 5000K

CRI: 80<

GENERAL DATA

Application : Shopping Centres, Office, Airport, Indoor Gymnasium, Warehouse, Factory etc..

Warranty: 5 Years



| Code | Type of Equipment | Power | CRI / Ra | Luminous Efficacy | Lumens | Operating Temperature Range |
|----------------|-------------------|-------|----------|-------------------|--------|-------------------------------------|
| 6760.XX80.XXX4 | ED | 80 | 80 | 130 | 10400 | -30 ⁰ ~ +50 ⁰ |
| 6760.X125.XXX4 | ED | 125 | 80 | 130 | 16250 | -30 ⁰ ~ +50 ⁰ |
| 6760.X145.XXX4 | ED | 145 | 80 | 130 | 18850 | -30 ⁰ ~ +50 ⁰ |
| 6760.X200.XXX4 | ED | 200 | 80 | 130 | 26000 | -30 ⁰ ~ +50 ⁰ |

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.



The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.

ORDER DETAILS

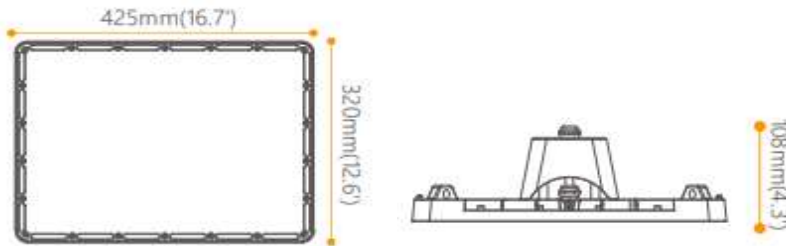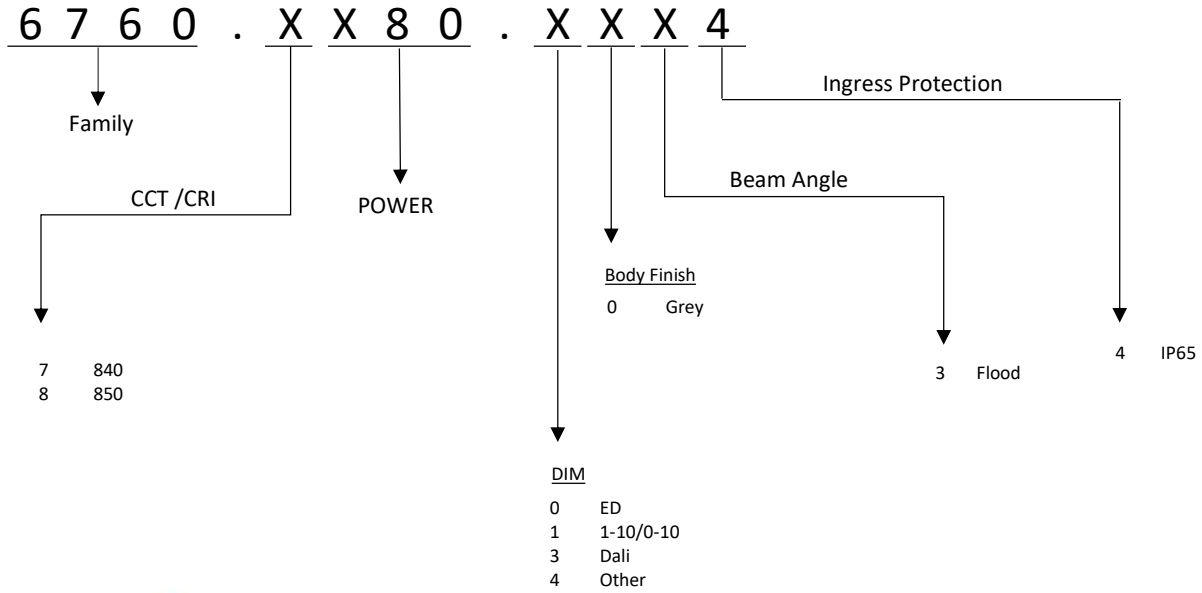

| Code | Dimension (mm) |
|----------------|-----------------------|
| 6760.XX80.XXX4 | L 425 X W 320 X H 108 |
| 6760.X125.XXX4 | L 425 X W 320 X H 108 |
| 6760.X145.XXX4 | L 425 X W 320 X H 108 |
| 6760.X200.XXX4 | L 425 X W 320 X H 108 |

Mounting Accessories (additional to be ordered separately)

| | | |
|--------------|----------------------------|--|
| Code: 6760.1 | U-Shaped Rotatable bracket | |
| Code: 6760.2 | Safety Chain | |



PHOTOMETRIC DISTRIBUTIONS

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.