

CE IP 66 IK 08

7652

Flood Light

TECHNICAL DATA

Mounting: Surface or Pole
Body: Aluminium
Colour: Black
Protection: IP66
Operation temperature: -30° ~ +50°

ELECTRICAL DATA


Power: 400W / 800W / 1200W / 1600W / 1800W
Type of Equipment: ED, Dimmable on request
Power factor: 0.92<
Input Voltage: AC 220-240V 50/60Hz

OPTICAL DATA

Beam Angle: Narrow, Medium, Wide
Way of lighting: Direct
Diffuser: PC Lens
CCT: 3000K / 4000K / 5700K
CRI: 70<

GENERAL DATA

Application : Airports, Large recreational sports facilities, Harbors, Squares, Industrial areas, Outdoor car parking etc..
Warranty: 5 Years
Accessories : Precision Aiming Device & Adjustable Visor for BLC Option on request

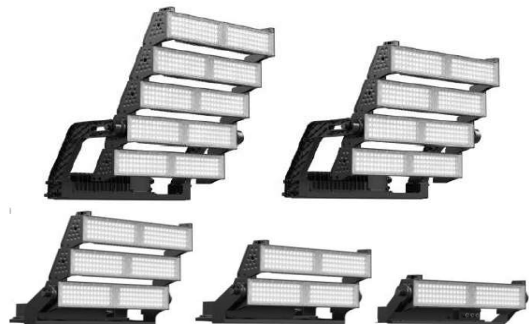


Code	Type of			Luminous		Operating Temperature
	Equipment	Power	CRI / Ra	Efficacy	Lumens	Range
7652.0400.XXX7	ED	400	70	120	48000	-30° ~ +50°
7652.0800.XXX7	ED	800	70	120	96000	-30° ~ +50°
7652.1200.XXX7	ED	1200	70	120	144000	-30° ~ +50°
7652.1600.XXX7	ED	1600	70	120	192000	-30° ~ +50°
7652.1800.XXX7	ED	1800	70	130	234000	-30° ~ +50°

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.
 The operating temperature ranges apply only to luminaires used in the outdoor environment.
 Power tolerance +/- 5%. Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.


ORDER DETAILS

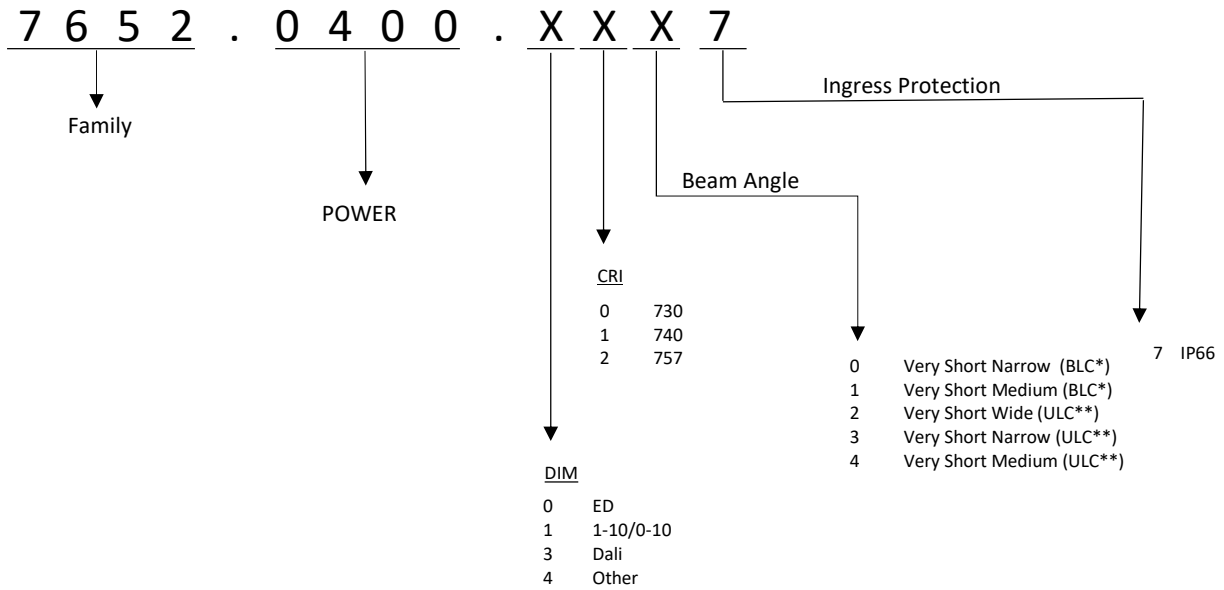


* Back Light Control

**Up Light Control

Code	Dimension (mm)	Weight (kg)
7652.0400.XXX7	L 219 X W 702 X H 294	10.2
7652.0800.XXX7	L 370 X W 702 X H 416	18.7
7652.1200.XXX7	L 515 X W 702 X H 486	23.6
7652.1600.XXX7	L 684 X W 756 X H 723	32.6
7652.1800.XXX7	L 829 X W 756 X H 794	36.3

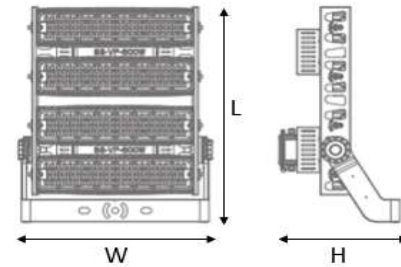

PHOTOMETRIC DISTRIBUTIONS

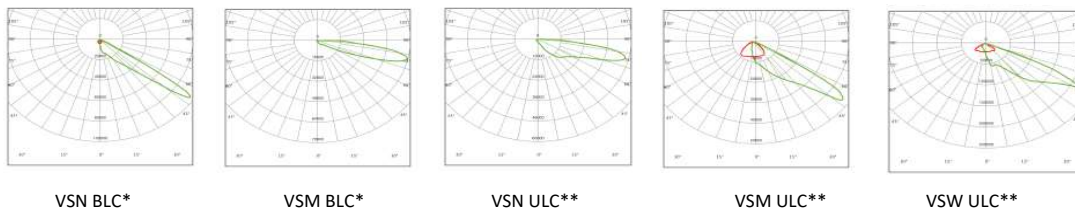

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%. Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.