

CE IP 66 IK 10

6502 Bollard

TECHNICAL DATA

Mounting: Surface
Body: Diecast Aluminium
Colour: Black, Other colour on request
Protection: IP66
Operation temperature: -25 - +50

ELECTRICAL DATA

Power: 15 / 25W
Type of Equipment: ED, Dimmable on request
Power factor: 0.9<

OPTICAL DATA

Beam Angle:
Way of lighting: Direct
Diffuser: PC
CCT: 3000K, 4000K, 5000K
CRI: 80<

GENERAL DATA

Warranty:
Application : Parks, Gardens, Pathway, Shopping malls etc..




Code	Type of Equipment	Power	CRI / Ra	Luminous Efficacy	Lumens	Operating Temperature Range
6502.X215.0147	ED/DIM	15	80	90	1350	-25 - +50
6502.X325.0147	ED/DIM	25	80	90	2250	-25 - +50

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.
 The operating temperature ranges apply only to luminaires used in the outdoor environment.
 Power tolerance +/- 5%.
 Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.

ORDER DETAILS

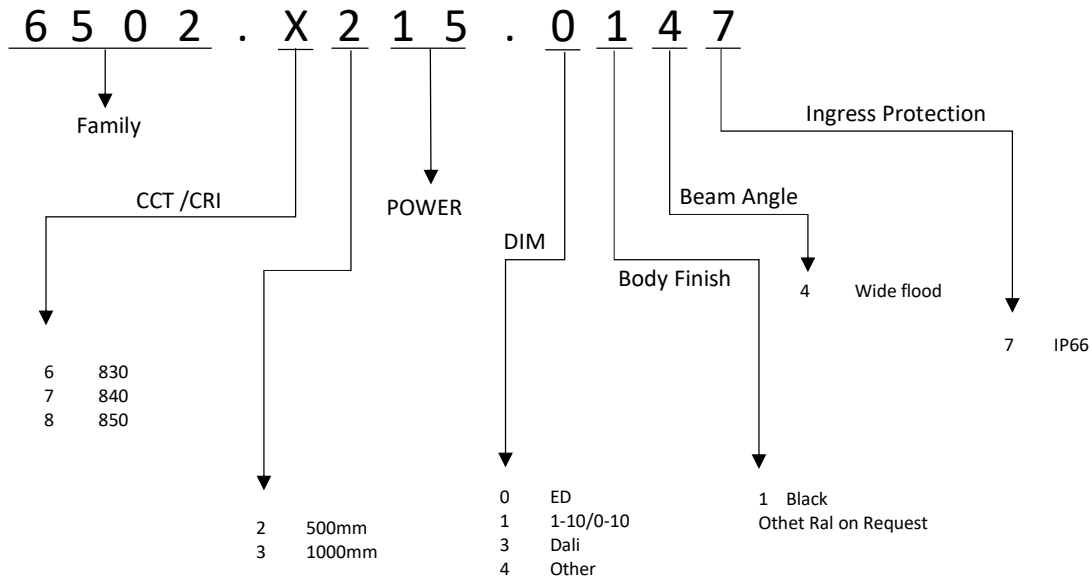

Code




6502.X215.0147

6502.X325.0147

Dimension (mm)

D 135 X H 500

D 135 X H 1000

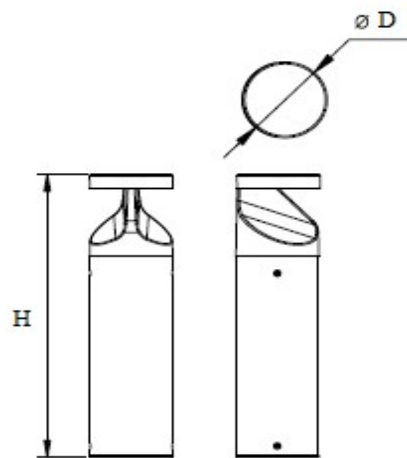

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.
The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.