

CE IP 44

2500

Panel light fixtures

TECHNICAL DATA

Mounting: Recessed Mounted
Body: CRCA Sheet steel
Colour: White
Protection: IP44
Operation temperature: 0 ~+35

ELECTRICAL DATA

Power:36W
Type of Equipment: ED (Dali ,1-10V on request)
Power factor: 0.90<
Input Voltage: AC 220-240V 50/60Hz.

OPTICAL DATA

Way of lighting: Direct
Diffuser: Opal
CCT: 3000K, 4000K, 6500K
CRI: 80<

GENERAL DATA

Application : Offices, Residential, Shops & School



Code	Type of Equipment	Power	CRI / Ra	Luminous Efficacy	Lumens	Operating Temperature range
2500.2036.0100	ED	36	80	112	4000	0 ~+35

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.

ORDER DETAILS

2500 . 2036 . 0104

Family

CCT /CRI

- 0 827
- 1 830
- 2 840
- 4 865
- 5 927
- 6 930
- 7 940
- 9 960

POWER

DIMMING

- 0 ED
- 1 1-10/0-10
- 3 Dali
- 4 Other

DIMENSION

- 01 595 x 595
- 02 1195 x 295
- 03 1195 x 595

Ingress Protection

ADDITION

- 0 IP00
- 1 IP20
- 2 IP44
- 3 IP54
- 4 IP65


- 0 Standard
- 1 Prismatic / UGR<19
- 2 Emergency

Code

Dimension (mm)


2500.2036.0100

L 595 W 595 H 33

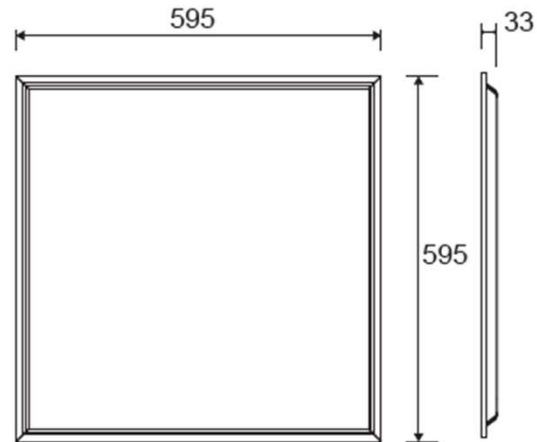

Dimensions are in mm

PHOTOMETRIC DISTRIBUTIONS

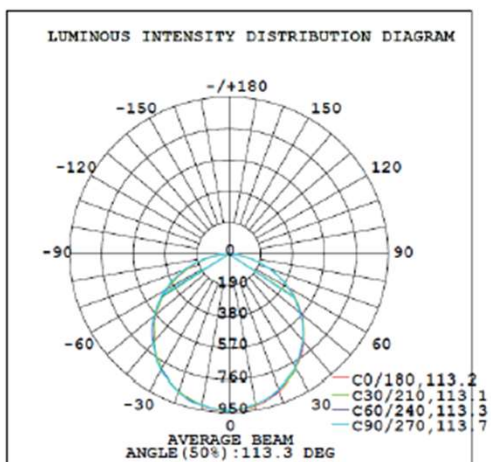

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.