

CE IP 65

7661 Flood Light

TECHNICAL DATA

Mounting: Surface or Pole

Body: Die Cast Aluminium

Colour: Black

Protection: IP65

Operation temperature: -30° ~ +50°

ELECTRICAL DATA

Power: 200W / 300W / 400W

Type of Equipment: ED, Dimmable on request

Power factor: 0.90<

Input Voltage: AC 220-240V 50/60Hz

OPTICAL DATA

Beam Angle:

Way of lighting: Direct

Diffuser: PC Lens

CCT: 3000K / 4000K / 6500K

CRI: 80<

GENERAL DATA

Application : Airports, Large recreational sports facilities, Harbors, Squares, Industrial areas, Outdoor car parking etc..

Warranty: 5 Years

Accessories :

**** Philips Driver & Philips LED 3030 Chip**



Code	Type of			Luminous		Operating Temperature
	Equipment	Power	CRI / Ra	Efficacy	Lumens	Range
7661.0200.XXX4	ED	200	80	140	28000	-30° ~ +50°
7661.0300.XXX4	ED	300	80	140	42000	-30° ~ +50°
7661.0400.XXX4	ED	400	80	140	56000	-30° ~ +50°


Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%. Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.

ORDER DETAILS

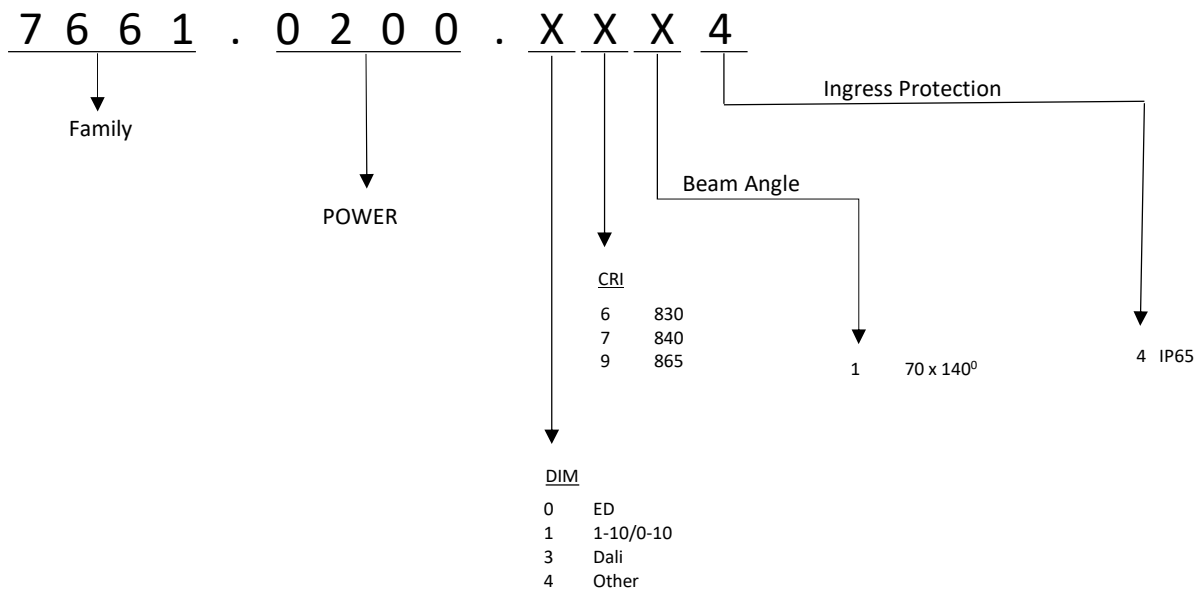

Code	Dimension (mm)
7661.0200.XXX4	345 X 230 X 150
7661.0300.XXX4	345 X 350 X 150
7661.0400.XXX4	345 X 470 X 150

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.
 The operating temperature ranges apply only to luminaires used in the outdoor environment.
 Power tolerance +/- 5%. Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.