

CE IP 65

3000

## Weather Proof Light Fixture

### TECHNICAL DATA

**Mounting:** Surface  
**Body:** PC Body  
**Colour:** Grey  
**Protection:** IP65  
**Operation temperature:** -25<sup>0</sup>~+50<sup>0</sup>

### ELECTRICAL DATA

**Power:** 18-48W  
**Type of Equipment:** ED, Dimmable on request  
**Power factor:** 0.9<  
**Input Voltage:** AC 220-240V/50-60Hz

### OPTICAL DATA

**Beam Angle:** Wide Beam  
**Way of lighting:** Direct  
**Diffuser:** PC  
**CCT:** 3000K, 4000K, 6500K  
**CRI:** 80<

### GENERAL DATA

**Warranty:**  
**Application :** Multilevel Car Parkings, Factories, Corridors, Warehouses, Tunnels etc..



Code	Type of		CRI / Ra	Luminous		Operating Temperature
	Equipment	Power		Efficacy	Lumens	Range
3000.2018.0104	ED	18	80	120	2160	-25 <sup>0</sup> ~+50 <sup>0</sup>
3000.2036.0204	ED	36	80	120	4320	-25 <sup>0</sup> ~+50 <sup>0</sup>
3000.2048.0304	ED	48	80	120	5760	-25 <sup>0</sup> ~+50 <sup>0</sup>

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.


The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.



Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.

## ORDER DETAILS

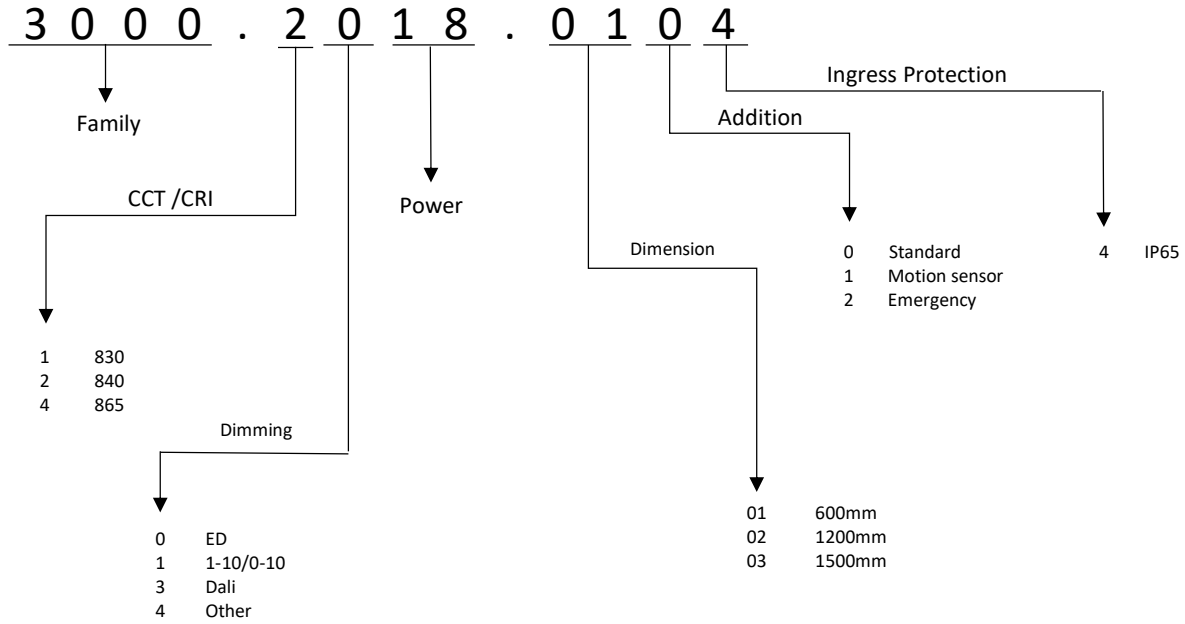

Code	Dimension (mm)
3000.2018.0104	L 610 X W 100 X H 75
3000.2036.0204	L 1210 X W 100 X H 75
3000.2048.0304	L 1510 X W 100 X H 75

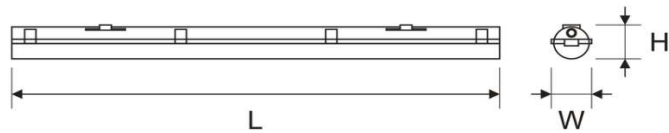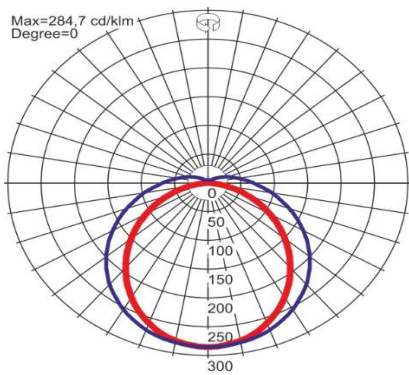

## PHOTOMETRIC DISTRIBUTIONS

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.