

CE IP 65 IK 08

## 6501 Bollard

### TECHNICAL DATA

**Mounting:** Surface  
**Body:** Diecast Aluminium  
**Colour:** Black, Other colour on request  
**Protection:** IP65  
**Operation temperature:** -25 - +50

### ELECTRICAL DATA

**Power:** 20 - 30W  
**Type of Equipment:** ED, Dimmable on request  
**Power factor:** 0.9<

### OPTICAL DATA

**Beam Angle:**  
**Way of lighting:** Direct  
**Diffuser:** PC  
**CCT:** 3000K, 4000K, 5000K  
**CRI:** 80<

### GENERAL DATA

**Warranty:**  
**Application :** Parks, Gardens, Pathway, Shopping malls etc..



Code	Type of Equipment	Power	CRI / Ra	Luminous Efficacy	Lumens	Operating Temperature Range
6501.X120.0144	ED/DIM	20	80	60	1200	-25 - +50
6501.X125.0144	ED/DIM	25	80	60	1500	-25 - +50
6501.X130.0144	ED/DIM	30	80	60	1800	-25 - +50
6501.X220.0144	ED/DIM	20	80	60	1200	-25 - +50
6501.X225.0144	ED/DIM	25	80	60	1500	-25 - +50
6501.X230.0144	ED/DIM	30	80	60	1800	-25 - +50
6501.X320.0144	ED/DIM	20	80	60	1200	-25 - +50
6501.X325.0144	ED/DIM	25	80	60	1500	-25 - +50
6501.X330.0144	ED/DIM	30	80	60	1800	-25 - +50

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.


The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.


Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.

## ORDER DETAILS

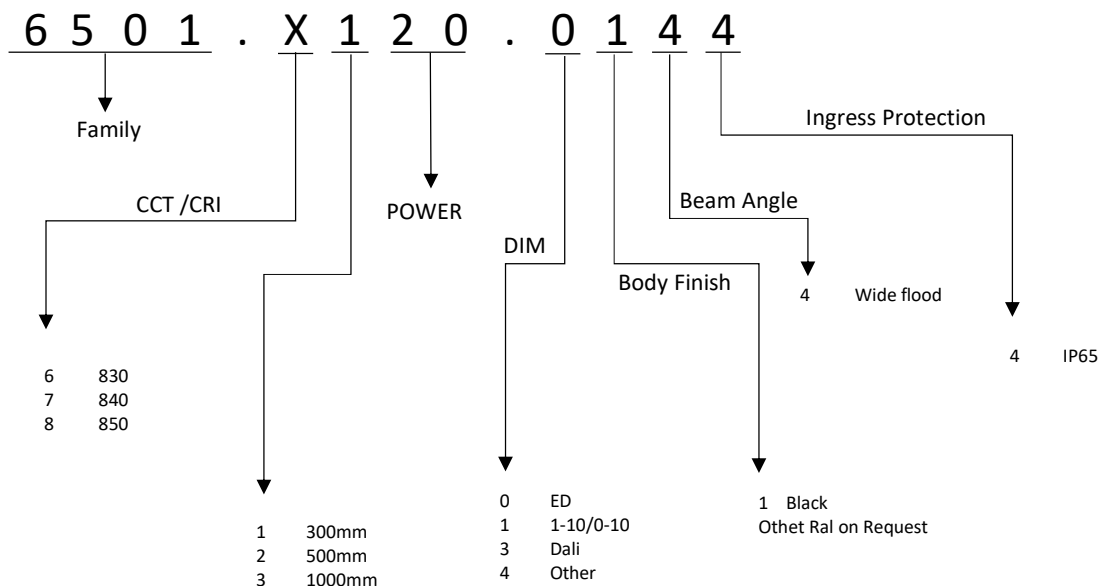

Code	Dimension (mm)
6501.X120.0144	D 168 X H 300
6501.X125.0144	D 168 X H 300
6501.X130.0144	D 168 X H 300
6501.X220.0144	D 168 X H 500
6501.X225.0144	D 168 X H 500
6501.X230.0144	D 168 X H 500
6501.X320.0144	D 168 X H 1000
6501.X330.0144	D 168 X H 1000
6501.X330.0144	D 168 X H 1000

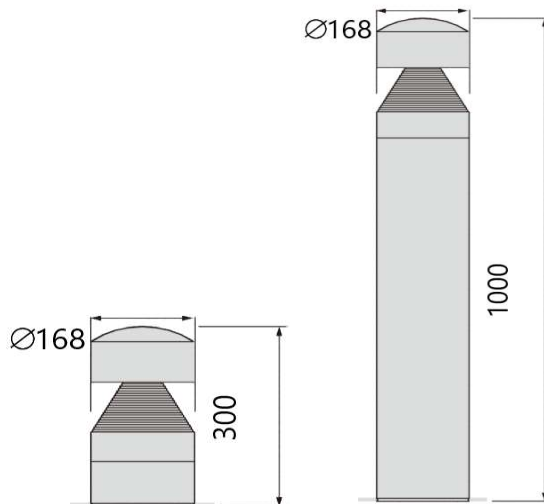

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.