

CE IP 20

2502

Panel light fixtures

TECHNICAL DATA

Mounting: Surface Mounted
Body: CRCA Sheet steel
Colour: White
Protection: IP20
Operation temperature: 0 ~+35

ELECTRICAL DATA

Power: 40W
Type of Equipment: ED (Dali ,1-10V on request)
Power factor: 0.90<
Input Voltage: AC 220-240V 50/60Hz.

OPTICAL DATA

Way of lighting: Direct
Diffuser: Opal
CCT: 3000K, 4000K, 6500K
CRI: 80<

GENERAL DATA

Application : Offices, Residential, Shops & School



Code	Type of Equipment	Power	CRI / Ra	Luminous Efficacy	Lumens	Operating Temperature range
2502.2040.0101	ED	40	80	120	4800	0 ~+35

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.

ORDER DETAILS

2502 . 2040 . 0101

Family

CCT /CRI

- 0 827
- 1 830
- 2 840
- 4 865
- 5 927
- 6 930
- 7 940
- 9 960

POWER

DIMMING

- 0 ED
- 1 1-10/0-10
- 3 Dali
- 4 Other

DIMENSION

- 01 595 x 595
- 02 1195 x 295
- 03 1195 x 595


ADDITION

Ingress Protection

- 0 IP00
- 1 IP20
- 2 IP44
- 3 IP54
- 4 IP65

- 0 Standard
- 1 Prismatic / UGR<19
- 2 Emergency

Code	Dimension (mm)		
2502.2040.0100	L 595	W 595	H 38

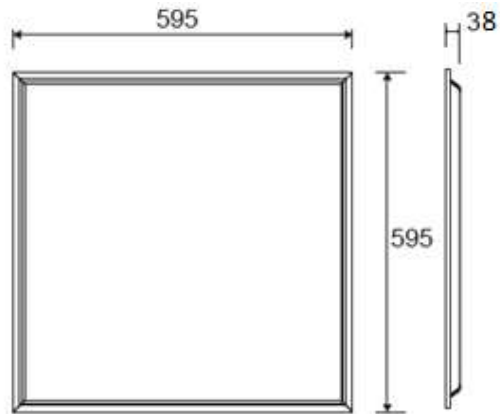

Dimensions are in mm

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

The EKO-LED Company reserves right to introduce any construction changes and improvements into the lighting.